

Innovative Infrared Technology



RESIDENTIAL • COMMERCIAL • CUSTOM
A P P L I C A T I O N S



# You may NEVER ha


WHETHER FOR WORK OR RECREATION, Infratech Comfort He outdoor areas into comfortable inviting spaces. A low cost, energy

- Restaurant/home patios
   Pools and spas, gazebos
- Factory areas and garages Spot heating for work stations



# MAKES OUTDOOR LIVING EASY ... EVERY DAY OF THE YEAR!

Extend your backyard fun with Infratech's W-Series Infrared Comfort Heaters





# ve to move inside again!

# aters turn cold indoor and efficient solution ideal for:


- Outdoor smoking areas
- Valet parking

The W-Series Heater incorporates a specially designed electric quartz heating element that produces safe infrared radiant energy. Radiant energy is only absorbed by solid objects and is not wasted heating the air. In addition, Infratech heaters emit no harmful ultraviolet rays.

ince there are no open flames or carbon monoxide emissions, mounting clearance requirements are minimal. W-Series fixtures can be installed at lower mounting heights, under canvas, wood awnings, eaves and in interior locations. Adjustable swivel mounts allow for ceiling or wall installation. Short standoffs allow the fixtures to seamlessly blend in with any restaurant or patio décor.

olid state and analog controls are available for intensity adjustment including multiple zones, timers and home system integration.

Low mounting heights and under canvas

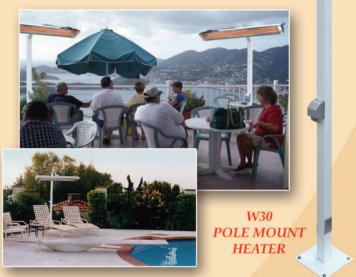


Warmth at poolside

- Suitable for Indoors or Outdoors -Ceiling, Wall, or Flush Mount
- Mounting brackets included
- Low cost of ownership
- Minimal clearance requirements
- Quartz elements rated for 5,000 hours
- No moving parts low maintenance
- Easily regulated heat output
- No tanks to fill
- One-year warranty
- UL Listed

NFRATECH'S parabolic reflector is made of a special corrosive resistant alloy, an important feature for humid climates or coastal areas.








W20 T-Bar Flush mount Frame (Available in White and Stainless Steel)




ng on your terrace or working in your garage or shop.


## **INSTALLATION OPTIONS**

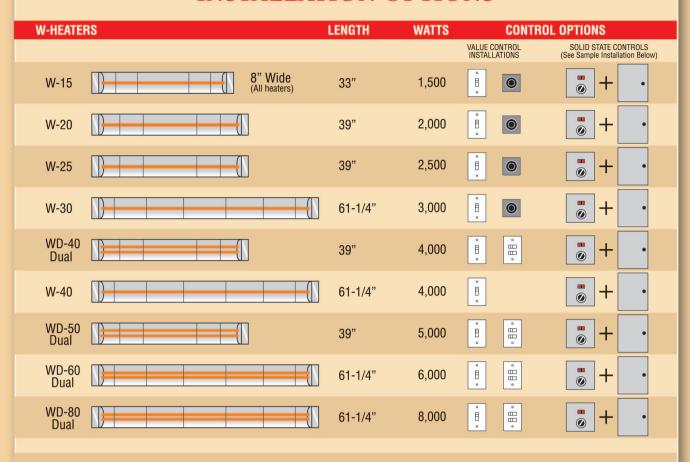

#### SAMPLE INSTALLATION USING SOLID STATE CONTROL OPTIONS FOR MULTIPLE W-SERIES HEATERS

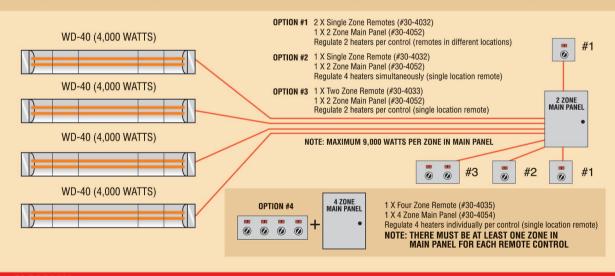


#### **GLOSSARY**

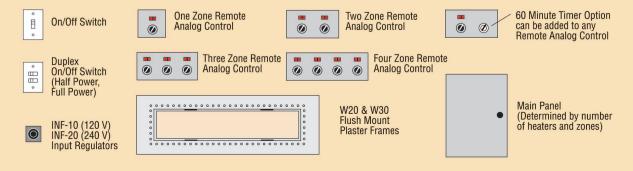

# **Choosing Your W-Series Heaters:**

## W-Series Single Element Heater

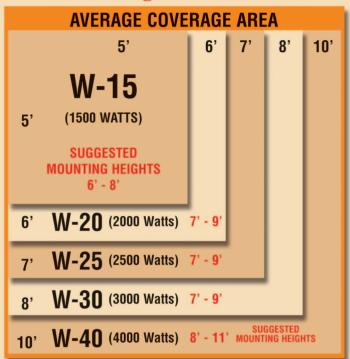

#### STEP #1 -

Determine the approximate measurements and mounting heights of the area you want coverage.

#### STEP #2 -

Choose the size heater(s) that will work both functionally and aesthetically (coverage area, length of heater, color of heater, ceiling, wall, or flush mount) for your installation.

#### STEP #3 -

Review installation table and choose (to fit your budget) between value control options or infinite adjustment with solid state controls. (*Professional installation is suggested*)

#### STEP #4 -

Turn on and enjoy the outdoors in comfort!

# Sample Control Options



Simple, Low Cost Input Regulators (Maximum 15 AMPS)



One Zone Remote Analog Control




Two Zone Remote Analog Control with 60 Min. Timer Option



Main Zone Control Panel

### WD-Series Dual Element Heaters

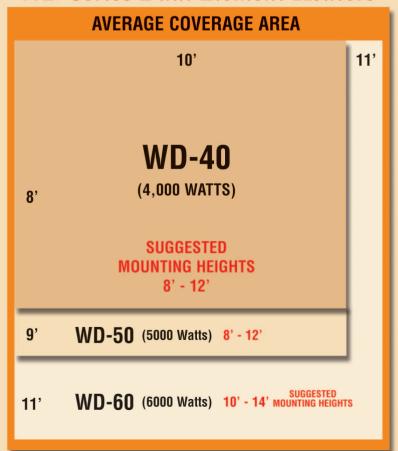

# "The world leader in infrared technology for more than 50 years"

INFRARED RADIANT HEATER PARTS LIST AND SPECIFICATIONS								
PART NUMBER	MODEL	LENGTH	BTU's	WATTS	VOLTS	AMPS	Shipping Weight	
"W" SERIES COMFORT HEATERS (STAINLESS STEEL) - Single Element								
21-1040 21-1045 21-1055 21-1080 21-1100 21-1125	W-1512 SS W-1524 SS W-2024 SS W-2524 SS W-3024 SS W-4024 SS	33" 33" 39" 39" 61-1/4" 61-1/4"	5,118 5,118 6,824 8,530 10,236 13,648	1500 1500 2000 2500 3000 4000	120 240 240 240 240 240	12.5 6.3 8.3 10.4 12.5 17.0	12 12 13 13 20 20	
"WD" SERIES COMFORT HEATERS (STAINLESS STEEL) - Dual Element								
21-2100 21-2200 21-2300 21-2400*	WD-4024 SS WD-5024 SS WD-6024 SS WD-8024 SS	39" 39" 61-1/4" 61-1/4" <b>S (POWDER COATED S</b> )	13,648 17,060 20,472 27,296	4000 5000 6000 8000	240 240 240 240	16.7 20.8 25.0 33.4	14 14 21 21	
22-1040 22-1045 22-1055 22-1080 22-1100 22-1125	W-1512 W-1524 W-2024 W-2524 W-3024 W-4024	33" 33" 39" 39" 61-1/4" 61-1/4"	5,118 5,118 6,824 8,530 10,236 13,648	1500 1500 2000 2500 3000 4000	120 240 240 240 240 240	12.5 6.3 8.0 10.4 12.5 17.0	12 12 13 13 20 20	
NOTE: ALL "W" AND "WD" SERIES HEATERS ARE ALSO AVAILABLE IN 208, 277, AND 480 VOLTS - CUSTOM COLORS ALSO AVAILABLE BY SPECIAL ORDER *WD-8024 SS IS RECOMMENDED FOR COMMERCIAL USE ONLY.  BLACK WHITE BROWN								
COMFORT CONTROLS SURFACE DIMENSIONS							3	
14-4092       INF-10 15 AMP Input Regulator w/Knob (120 Volts)       2" x 2"         14-4094       INF-20 15 AMP Input Regulator w/Knob (240 Volts)       2" x 2"         30-4032       1 Zone Remote Analog Control       5 1/2" x 5 1/2"         30-4033       2 Zone Remote Analog Control       5 1/2" x 9 1/2"         30-4034       3 Zone Remote Analog Control       5 1/2" x 13"         30-4035       4 Zone Remote Analog Control       5 1/2" x 15"         30-4040       Analog Remote Timer Option (Order with Remote Analog Control)						1 1 2 4 5 6 2		
MAIN PANELS					SURFACE DIMENSIONS			
30-4051 30-4052 30-4053 30-4054	1 Zone Main Control Box 2 Zone Main Control Box 3 Zone Main Control Box 4 Zone Main Control Box 16" x 12" 16" x 12"					23 26 28 30		
ACCESSORII	ACCESSORIES FITS					SURFACE DIMENSIONS		
18-2300 18-2305 18-2315 22-1250 22-1255	W20 FLUSH MOUNT PLASTER FRAME  W30 FLUSH MOUNT PLASTER FRAME  W20 T-BAR FLUSH MOUNT FRAME (White)  W20 POLE MOUNT  W30 POLE MOUNT					16 24 20 150 150		



Innovative Infrared Technology

344 West 157th Street, Gardena, CA U.S.A. 90248 (800) 421-9455 or (310) 354-1250 • FAX (310) 523-3674

ONE-YEAR WARRANTY • PROUDLY MADE IN U.S.A.