


3310 Series Fan Forced Wall Heater - With Summer Fan Switch

74

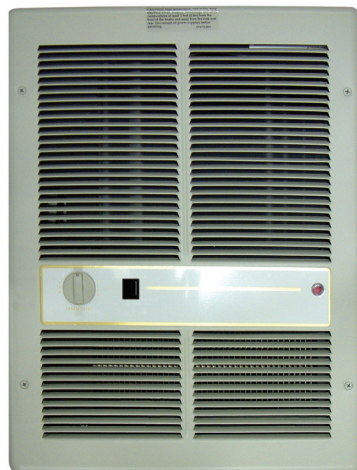

Features

- Powder coated 18 Gauge steel front.
- Automatic reset thermal limit.
- Steel block fin element.
- Weight 22 lbs.
- Vane axial fan blade: 600 RPM / 175 CFM.
- Rough in dimensions: 14 3/16" wide x 19 15/16" high x 4" deep.
- Grill dimensions: 15 3/8" wide x 20 9/64" high.
- Units with dual wattage, factory wired to highest wattage.
- Watts selectable at time of installation.



Product Specifications

Typical Specifications: Furnish and install Electric Forced Air Heaters where specified. The heaters shall be constructed of a heavy Gauge steel housing. The rough-in dimensions are 19-5/16" high x 14-3/16" wide x 4" deep. The finish shall be powder coated paint in ivory or white color. The units shall be available in ratings from 750 through 4800 Watts. The heaters shall have a low speed 600 RPM

motor which drives a vane axial blower to deliver a quiet 175 CFM of down flow air. The heating element shall be of the sealed block fin type with large, parallel steel fins for quick heat transfer. Unit shall have a standard thermal overload cutoff for added safety, a fan switch for fan only operation, and is available with a single pole, or double pole built-in thermostat, or no thermostat. The in-built thermostat shall be calibrated to provide a range of 50 degrees F. to 90 degrees F. All heaters shall be listed by Underwriters' Laboratories, Incorporated. The heating element shall be supplied with a manufacturer's 1 year limited warranty.

Standard Models


MODELS WITH IN-BUILT DOUBLE POLE THERMOSTAT (50° - 90°F TEMPERATURE RANGE)							
IVORY		WHITE		WATTS	MAX BTU's	VOLTS	AMPS
UPC 686334	IVORY	UPC 686334	WHITE				
326063	E3312T2SRP	326209	E3312T2SRPW	1000	3413	120	8.3
326070	E3313T2SRP	326216	E3313T2SRPW	1500	5120		12.5
				750	2560		6.25
326087	F3316T2SRP	326223	F3316T2SRPW	4000	13648	208	19.2
326094	F3317T2SRP	326230	F3317T2SRPW	4800	16380		23
326124	HF3315T2SRP	326261	HF3315T2SRPW	3000 / 2250	10240	240 / 208	12.5 / 10.8
				1500 / 1125	5120		6.2 / 5.4
326131	HF3316T2SRP	326278	HF3316T2SRPW	4000 / 3000	13648		16.8 / 14.4
				2000 / 1500	6826		8.3 / 7.2
326148	H3317T2SRP	326285	H3317T2SRPW	4800	16380	240	20.0
326155	G3314T2SRP	326292	G3314T2SRPW	2000	6826	277	7.2
326162	G3315T2SRP	326308	G3315T2SRPW	3000	10240		10.8
326179	G3316T2SRP	326315	G3316T2SRPW	4000	13648		14.4
326186	G3317T2SRP	326322	G3317T2SRPW	4800	16380		17.3

MODELS WITH IN-BUILT SINGLE POLE THERMOSTAT (50° - 90°F TEMPERATURE RANGE)							
382571	E3312TSRP	382595	E3312TSRPW	1000	3413	120	8.3
379618	E3313TSRP	384018	E3313TSRPW	1500	5120		12.5
				750	2560		6.25
377713	F3316TSRP	384025	F3316TSRPW	4000	13648	208	19.2
377782	F3317TSRP	384032	F3317TSRPW	4800	16380		23
377607	HF3315TSRP	384070	HF3315TSRPW	3000 / 2250	10240	240 / 208	12.5 / 10.8
				1500 / 1125	5120		6.2 / 5.4
377690	HF3316TSRP	384087	HF3316TSRPW	4000 / 3000	13648		16.8 / 14.4
				2000 / 1500	6826		8.3 / 7.2
377768	H3317TSRP	384094	H3317TSRPW	4800	16380	240	20.0
377553	G3314TSRP	384117	G3314TSRPW	2000	6826	277	7.2
377645	G3315TSRP	384124	G3315TSRPW	3000	10240		10.8
377737	G3316TSRP	384131	G3316TSRPW	4000	13648		14.4
377805	G3317TSRP	384148	G3317TSRPW	4800	16380		17.3

Accessories - All Models

IVORY		WHITE		DESCRIPTION	ACCESSORY TYPE
UPC 686334	MODEL	UPC 686334	MODEL		
377850	BOX3310	377850	BOX3310	ADDITIONAL BACK CAN	Field Installed
329958	3310EX33R	329965	3310EX33WR	SURFACE MOUNTING FRAME	
SUFFIX D				DISCONNECT SWITCH	Factory Installed

3310 Series Fan Forced Wall Heater - Without Summer Fan Switch

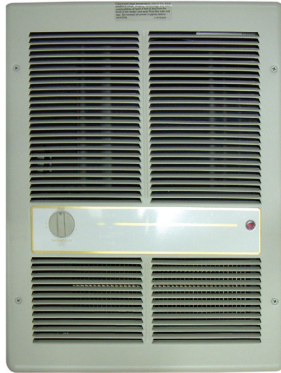

Features

- Powder coated 18 Gauge steel front.
- Automatic reset thermal limit.
- Steel block fin element.
- Weight 22 lbs.
- Vane axial fan blade: 600 RPM / 175 CFM.
- Rough in dimensions: 14 3/16" wide x 19 15/16" high x 4" deep.
- Grill dimensions: 15 3/8" wide x 20 9/64" high.
- Units with dual wattage, factory wired to highest wattage.
- Watts selectable at time of installation.



Standard Models

MODELS WITH IN-BUILT DOUBLE POLE THERMOSTAT (50° - 90° F TEMPERATURE RANGE)							
IVORY		WHITE		WATTS	MAX BTU's	VOLTS	AMPS
UPC 686334	IVORY MODEL	UPC 686334	WHITE MODEL				
326346	E3312T2RP	326483	E3312T2RPW	1000	3413	120	8.3
326353	E3313T2RP	326490	E3313T2RPW	1500	5120		12.5
				750	2560		6.25
326360	F3316T2RP	326506	F3316T2RPW	4000	13648	208	19.2
326377	F3317T2RP	326513	F3317T2RPW	4800	16380		23
326407	HF3315T2RP	326544	HF3315T2RPW	3000 / 2250	10240	240 / 208	12.5 / 10.8
				1500 / 1125	5120		6.2 / 5.4
326414	HF3316T2RP	326551	HF3316T2RPW	4000 / 3000	13648		16.8 / 14.4
				2000 / 1500	6826		8.3 / 7.2
326421	H3317T2RP	326568	H3317T2RPW	4800	16380	240	20.0
326438	G3314T2RP	326575	G3314T2RPW	2000	6826	277	7.2
326445	G3315T2RP	326582	G3315T2RPW	3000	10240		10.8
326452	G3316T2RP	326599	G3316T2RPW	4000	13648		14.4
326469	G3317T2RP	326605	G3317T2RPW	4800	16380		17.3

Models With In-Built Single Pole Thermostat (50° - 90° F temperature range)							
382526	E3312TRP	382618	E3312TRPW	1000	3413	120	8.3
380652	E3313TRP	384162	E3313TRPW	1500	5120		12.5
				750	2560		6.25
379946	F3316TRP	384186	F3316TRPW	4000	13648	208	19.2
380300	F3317TRP	384193	F3317TRPW	4800	16380		23
380560	HF3315TRP	382229	HF3315TRPW	3000 / 2250	10240	240 / 208	12.5 / 10.8
				1500 / 1125	5120		6.2 / 5.4
379984	HF3316TRP	382236	HF3316TRPW	4000 / 3000	13648		16.8 / 14.4
				2000 / 1500	6826		8.3 / 7.2
380317	H3317TRP	382243	H3317TRPW	4800	16380	240	20.0
329873	G3314TRP	384261	G3314TRPW	2000	6826	277	7.2
328494	G3315TRP	328517	G3315TRPW	3000	10240		10.8
328500	G3316TRP	328524	G3316TRPW	4000	13648		14.4
379179	G3317TRP	384292	G3317TRPW	4800	16380		17.3

Models Without An In-Built Thermostat							
326629	E3312RP	326766	E3312RPW	1000	3413	120	8.3
326636	E3313RP	326773	E3313RPW	1500	5120		12.5
				750	2560		6.25
328531	F3316RP	326780	F3316RPW	4000	13648	208	19.2
326650	F3317RP	326797	F3317RPW	4800	16380		23
326681	HF3315RP	326827	HF3315RPW	3000 / 2250	10240	240 / 208	12.5 / 10.8
				1500 / 1125	5120		6.2 / 5.4
326698	HF3316RP	326834	HF3316RPW	4000 / 3000	13648		16.8 / 14.4
				2000 / 1500	6826		8.3 / 7.2
326704	H3317RP	326841	H3317RPW	4800	16380	240	20.0
326711	G3314RP	326858	G3314RPW	2000	6826	277	7.2
326728	G3315RP	326865	G3315RPW	3000	10240		10.8
326735	G3316RP	326872	G3316RPW	4000	13648		14.4
326742	G3317RP	326889	G3317RPW	4800	16380		17.3