


COMMERCIAL RECESS MOUNTED CEILING HEATERS



3480 SERIES

- Radial Diffuser
- White Powder Coated 20 ga. grill
- 208v / 240v / 277v units have manual reset thermal limit
- 480v units have automatic reset thermal limit and 24 volt control transformer and 24v relay (A1 suffix)
- Enclosed steel fin sheath element
- Propeller style fan blade: 1300 RPM motor; 425 CFM
- Weight 50 lbs.
- Rough in dimensions: 23 1/16" square x 9 1/8" deep
- Optional factory installed adjustable louver diffuser.

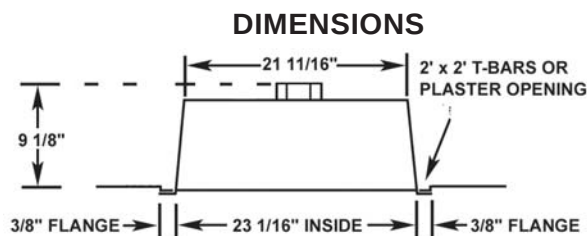

SIDE VIEW


UPC 686334	MODEL	KW	BTU'S	VOLTS	PH	AMPS	TEMP RISE	LIST
367653	F3482	2	6826	208	1	9.6	15 °F	1235
367677	H3482			240		8.3		
367660	G3482			277		7.2		
318471	P3482A1			480		4.2		
367684	F3483	3	10200	208	1	14.4	22 °F	1250
367707	H3483			240		12.5		
367691	G3483			277		10.8		
318488	P3483A1			480		6.3		
367714	F3484	4	13600	208	1	19.2	30 °F	1264
367738	H3484			240		16.8		
367721	G3484			277		14.4		
318501	P3484A1			480		8.3		
367745	J3484	4	13600	208	3	11.1	30 °F	1365
367752	K3484			240		9.7		
318587	Y3484A1			480		4.8		
367769	F3485	5	17000	208	1	24.1	37 °F	1418
367783	H3485			240		20.8		
367776	G3485			277		18.1		
318549	P3485A1			480		10.4		
367790	J3485	5	17000	208	3	13.9	37 °F	1505
367806	K3485			240		12.1		
318402	Y3485A1			480		6.1		
366106	PT3480	Recess Frame - Weight 5 lbs.						131

FACTORY INSTALLED CONTROL OPTIONS

Temp range on all inbuilt thermostats is 50° - 90°F

SUFFIX	DESCRIPTION	LIST
A1	Transformer with 24V Secondary and 24V Relay	117
S	Disconnect Switch	146
TA1S	Thermostat / Transformer / Disconnect Switch	343
TA1	Single Pole Thermostat and Transformer with 24V Secondary and 24V Relay	213
A1S	Transformer with 24V Secondary and 24V Relay and Disconnect Switch	265
T2	Double Pole Thermostat	116
T2S	Double Pole Thermostat and Disconnect Switch	260
R	Relay Control Voltage Same as Heater (control voltage field supplied)	72
R1	Relay 24V Control Voltage (control voltage field supplied)	117
R2	Relay 120V Control Voltage (control voltage field supplied)	108

FACTORY INSTALLED ADJUSTABLE LOUVER DIFFUSER OPTION



If required add L suffix to model number

LIST ADDER ...\$63