




PACKAGED DUCT HEAT

- Galvanized Steel Element Rack - Always 1" shorter than duct height and 1/2" shorter than duct width to allow insertion clearance
- Galvanized Steel Compartment with 1/2" fiberglass Insulation & Hinged Cover
- Door Interlock Disconnect Switch
- Primary Automatic Reset Temp Limiting Control
- Load Carrying Secondary over Temperature Protective Device(s)
- Definite Purpose Magnetic Contactor(s)
- Differential Pressure Fan Inter-lock Switch
- Step Down Control Transformer / 24 volt
- Permanently Attached Wiring Diagram on inside of Terminal Compartment Cover

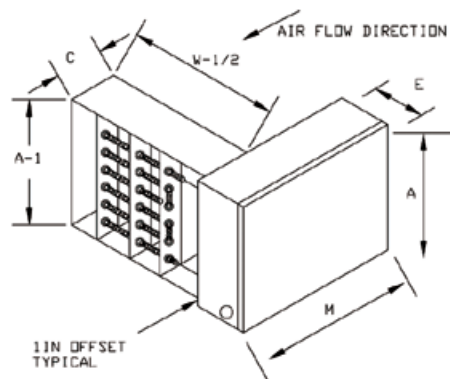

UPC 686334	MODEL NUMBER	kW	POWER VOLTS/ PHASE	DUCT HEIGHT A	DUCT WIDTH W	DIMENSIONS			AMPS	CONTROL STEPS	Wt. (LBS.)	LIST
						C	E	M				
617000	PD5-812-1	5	240-1	8	12	4 3/4	6 1/2	26	20.9	1	22	721
617017	PD10-1018-1	10		10	18	4 3/4	6 1/2	28	41.7	2	37	968
617024	PD15-1218-1	15		12	18	4 3/4	6 1/2	27	62.5	2	33	1133
617031	PD20-1220-1	20		12	20	9 1/8	7 1/2	31	83.3	2	37	1421
617048	PD25-1620-1	25		16	20	9 1/8	7 1/2	38	104.2	3	56	2266
617055	7PD2-812-1	2	277-1	8	12	4 3/4	6 1/2	26	7.2	1	21	721
617062	7PD3.5-812-1	3.5							12.6			742
617079	7PD5-812-1	5							18.1			952
617086	8PD5-812-3	5	208-3	8	12	4 3/4	6 1/2	26	13.9	1	22	832
617093	8PD10-1018-3	10		10	18	4 3/4	6 1/2	22	27.8	1	27	850
617109	8PD15-1218-3	15		12	18	9 1/8	6 1/2	25	41.7	1	32	989
617116	8PD15-1218-2-3	15		12	18	9 1/8	6 1/2	28	41.7	2	34	1040
617123	8PD20-1220-3	20		12	20	9 1/8	6 1/2	40	55.6	2	39	1257
617130	8PD25-1620-3	25		16	20	9 1/8	6 1/2	29	69.5	2	58	1267
617147	8PD30-1624-2-3	30		16	24	9 1/8	7 1/2	29	83.4	2	65	1803
617154	8PD30-1624-3	30		16	24	9 1/8	7 1/2	35	83.4	3	60	1833
617437	8PD35-1624-3	35		16	24	9 1/8	7 1/2	35	97.3	3	65	1957
617321	8PD40-1624-3	40		16	24	9 1/8	7 1/2	43	111.2	3	75	2472
617338	8PD45-1630-3	45		16	30	9 1/8	7 1/2	43	125.1	3	80	2524
617345	8PD50-1630-3	50		16	30	9 1/8	7 1/2	43	139	3	85	2575
617161	PD-812-3	5	240-3	8	12	4 3/4	6 1/2	26	12.1	1	21	700
617178	PD10-1018-3	10		10	18	4 3/4	6 1/2	22	24.1	1	26	773
617185	PD15-1218-1-3	15		12	18	4 3/4	6 1/2	20	36.2	1	30	865
617192	PD15-1218-2-3	15		12	18	9 1/8	6 1/2	26	36.2	2	33	886
617208	PD20-1220-3	19.9		12	20	9 1/8	6 1/2	28	47.9	2	39	1133
617215	PD25-1620-3	25		16	20	9 1/8	6 1/2	29	60.2	2	57	1267
617222	PD30-1624-2-3	30		16	24	4 3/4	6 1/2	25	72.3	2	57	1401
617239	PD30-1624-3-3	30		16	24	9 1/8	6 1/2	35	72.3	3	65	1463
617352	PD35-1624-3	35		16	24	9 1/8	7 1/2	35	84.3	3	65	1627
617369	PD40-1624-3	40		16	24	9 1/8	7 1/2	35	96.3	3	75	1875
617376	PD45-1630-3	45		16	30	9 1/8	7 1/2	43	108.4	3	80	2431
617383	PD50-1630-3	49.8		16	30	9 1/8	7 1/2	43	120	3	85	2534
617246	4PD5-812-3	5	480-3	8	12	4 3/4	6 1/2	26	6.1	1	21	803
617253	4PD10-1018-3	10		10	18	4 3/4	6 1/2	22	12.1	1	26	850
617260	4PD15-1218-3	15		12	18	4 3/4	6 1/2	20	18.1	1	30	896
617277	4PD15-1218-2-3	15		12	18	9 1/8	6 1/2	26	18.1	2	34	1030
617284	4PD20-1220-3	20		12	20	9 1/8	6 1/2	26	24.1	2	39	1051
617291	4PD25-1620-3	25		16	20	9 1/8	6 1/2	22	30.1	2	58	1082
617307	4PD30-1624-2-3	30		16	24	4 3/4	6 1/2	18	36.2	2	65	1112
617314	4PD30-1624-3-3	30		16	24	9 1/8	6 1/2	24	36.2	3	65	1174
617390	4PD35-1624-3	35		16	24	9 1/8	6 1/2	26	42.2	3	65	1504
617406	4PD40-1624-3	39.9		16	24	9 1/8	6 1/2	40	48.1	3	75	1700
617420	4PD50-1630-3	50		16	30	9 1/8	6 1/2	36	60.2	3	85	2060