


# LOW PROFILE FAN FORCED WALL HEATERS

## (WITHOUT WALL BOX)

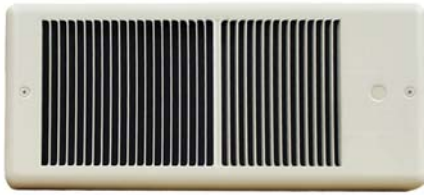

**4300 SERIES**  
**NO IN-BUILT THERMOSTAT**

- Available in ivory or white
- Powder coated 20 ga. steel front
- Manual reset thermal limit
- Finned tubular steel element
- Propeller style fan blade - 2200 RPM / 70 CFM
- Weight 9 lbs.
- Rough in dimensions - 14 1/2" wide - 7 1/8" high - 3 1/2" deep
- Grill dimensions - 16 3/4" wide - 7 5/8" high
- Unit not approved for ceiling mount applications
- Unit can be positioned to allow left, right or top discharge



**4300 SERIES**  
**IN-BUILT THERMOSTAT**



**DOUBLE POLE**  
**IN-BUILT**  
**THERMOSTAT**  
(range 50°-90°F)

| IVORY         |          | WHITE         |           | VOLTS   | WATTS       | MAX<br>BTU'S | AMPS      | LIST       |
|---------------|----------|---------------|-----------|---------|-------------|--------------|-----------|------------|
| UPC<br>686334 | MODEL    | UPC<br>686334 | MODEL     |         |             |              |           |            |
| 327213        | F4320T2  | 327268        | F4320T2W  | 208     | 2000        | 6826         | 9.6       | <b>205</b> |
| 327220        | HF4375T2 | 327275        | HF4375T2W | 240/208 | 750 / 562   | 2560 / 1920  | 3.1 / 2.7 |            |
| 327237        | HF4310T2 | 327282        | HF4310T2W |         | 1000 / 750  | 3413 / 2560  | 4.2 / 3.6 |            |
| 327244        | HF4315T2 | 327299        | HF4315T2W |         | 1500 / 1125 | 5120 / 3840  | 6.3 / 5.4 |            |
| 327251        | HF4320T2 | 327305        | HF4320T2W |         | 2000 / 1500 | 6826 / 5120  | 8.3 / 7.2 |            |

**SINGLE POLE**  
**IN-BUILT**  
**THERMOSTAT**  
(range 50°-90°F)

|        |         |        |          |         |             |             |           |            |
|--------|---------|--------|----------|---------|-------------|-------------|-----------|------------|
| 327312 | E4375T  | 327398 | E4375TW  | 120     | 750         | 2560        | 6.25      | <b>192</b> |
| 327329 | E4310T  | 327404 | E4310TW  |         | 1000        | 3413        | 8.33      |            |
| 327336 | E4315T  | 327411 | E4315TW  |         | 1500        | 5120        | 12.5      |            |
| 327343 | F4320T  | 327428 | F4320TW  | 208     | 2000        | 6826        | 9.6       |            |
| 327350 | HF4375T | 327435 | HF4375TW | 240/208 | 750 / 562   | 2560 / 1920 | 3.1 / 2.7 |            |
| 327367 | HF4310T | 327442 | HF4310TW |         | 1000 / 750  | 3413 / 2560 | 4.2 / 3.6 |            |
| 327374 | HF4315T | 327459 | HF4315TW |         | 1500 / 1125 | 5120 / 3840 | 6.3 / 5.4 |            |
| 327381 | HF4320T | 327466 | HF4320TW |         | 2000 / 1500 | 6826 / 5120 | 8.3 / 7.2 |            |

**NO IN-BUILT**  
**THERMOSTAT**  
Use with line voltage  
wall thermostat-page 69  
or field installed  
thermostats shown below

|        |        |        |         |         |             |             |           |            |
|--------|--------|--------|---------|---------|-------------|-------------|-----------|------------|
| 327473 | E4375  | 327558 | E4375W  | 120     | 750         | 2560        | 6.25      | <b>172</b> |
| 327480 | E4310  | 327565 | E4310W  |         | 1000        | 3413        | 8.33      |            |
| 327497 | E4315  | 327572 | E4315W  |         | 1500        | 5120        | 12.5      |            |
| 327503 | F4320  | 327589 | F4320W  | 208     | 2000        | 6826        | 9.6       |            |
| 327510 | HF4375 | 327596 | HF4375W | 240/208 | 750 / 562   | 2560 / 1920 | 3.1 / 2.7 |            |
| 327527 | HF4310 | 327602 | HF4310W |         | 1000 / 750  | 3413 / 2560 | 4.2 / 3.6 |            |
| 327534 | HF4315 | 327619 | HF4315W |         | 1500 / 1125 | 5120 / 3840 | 6.3 / 5.4 |            |
| 327541 | HF4320 | 327626 | HF4320W |         | 2000 / 1500 | 6826 / 5120 | 8.3 / 7.2 |            |

### ACCESSORIES

| UPC<br>686334 | MODEL           | ACCESSORY OPTIONS                                         | WT.<br>LBS. | LIST       |
|---------------|-----------------|-----------------------------------------------------------|-------------|------------|
| 327633        | BOX 4300        | WALL BOX for 4200 / 4300 / 4400 / 4800 SERIES HEATERS     | 5           | <b>33</b>  |
| 327640        | BOX 4300-5 PACK | 5 WALL BOXES for 4200 / 4300 / 4400 / 4800 SERIES HEATERS | 25          | <b>163</b> |


| UPC<br>686334                  | IVORY<br>MODEL | UPC<br>686334 | WHITE<br>MODEL | ACCESSORY OPTIONS                      | WT.<br>LBS. | LIST      |
|--------------------------------|----------------|---------------|----------------|----------------------------------------|-------------|-----------|
| 327657                         | 4300EX8        | 328456        | 4300EX8W       | 1" SEMI RECESSING EXTENDER             | 2           | <b>39</b> |
| 327664                         | 4300EX16       | 328463        | 4300EX16W      | 2" SEMI RECESSING EXTENDER             | 3           | <b>42</b> |
| 327671                         | 4300EX32       | 328470        | 4300EX32W      | 4" SURFACE MOUNTING FRAME              | 4           | <b>45</b> |
| 327688                         | 4300P          | 328487        | 4300PW         | WALL PLATE ADAPTOR (OD 21.5" x 12.25") | 1           | <b>28</b> |
| FIELD INSTALLED<br>THERMOSTATS |                | 329774        | 43T            | SINGLE POLE THERMOSTAT 50° - 90° F     | 1           | <b>42</b> |
|                                |                | 329781        | 43T2           | DOUBLE POLE THERMOSTAT 50° - 90° F     | 1           | <b>48</b> |

# LOW PROFILE FAN FORCED WALL HEATERS

## (WITH WALL BOX)



**4300 SERIES**  
**NO IN-BUILT THERMOSTAT**

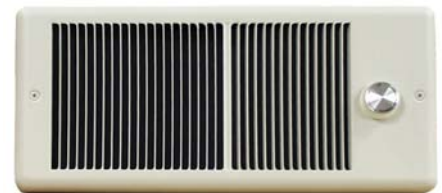

**4300 SERIES**  
**IN-BUILT THERMOSTAT**

- Available in ivory or white
- Powder coated 20 ga. steel front
- Manual reset thermal limit
- Finned tubular steel element
- Propeller style fan blade - 2200 RPM / 70 CFM
- Weight 9 lbs.
- Rough in dimensions - 14 1/2" wide - 7 1/8" high - 3 1/2" deep
- Grill dimensions - 16 3/4" wide - 7 5/8" high
- Unit not approved for ceiling mount applications
- Unit can be positioned to allow left, right or top discharge



**DOUBLE POLE**  
**IN-BUILT**  
**THERMOSTAT**  
(range 50°-90°F)

| IVORY         |            | WHITE         |             | VOLTS     | WATTS       | MAX<br>BTU'S | AMPS      | LIST       |
|---------------|------------|---------------|-------------|-----------|-------------|--------------|-----------|------------|
| UPC<br>686334 | MODEL      | UPC<br>686334 | MODEL       |           |             |              |           |            |
| 327695        | F4320T2RP  | 327749        | F4320T2RPW  | 208       | 2000        | 6826         | 9.6       | <b>222</b> |
| 327701        | HF4375T2RP | 327756        | HF4375T2RPW | 240 / 208 | 750 / 562   | 2560 / 1920  | 3.1 / 2.7 |            |
| 327718        | HF4310T2RP | 327763        | HF4310T2RPW |           | 1000 / 750  | 3413 / 2560  | 4.2 / 3.6 |            |
| 327725        | HF4315T2RP | 327770        | HF4315T2RPW |           | 1500 / 1125 | 5120 / 3840  | 6.3 / 5.4 |            |
| 327732        | HF4320T2RP | 327787        | HF4320T2RPW |           | 2000 / 1500 | 6826 / 5120  | 8.3 / 7.2 |            |

**SINGLE POLE**  
**IN-BUILT**  
**THERMOSTAT**  
(range 50°-90°F)

|        |           |        |            |           |             |             |           |            |
|--------|-----------|--------|------------|-----------|-------------|-------------|-----------|------------|
| 327794 | E4375TRP  | 327879 | E4375TRPW  | 120       | 750         | 2560        | 6.25      | <b>208</b> |
| 327800 | E4310TRP  | 327886 | E4310TRPW  |           | 1000        | 3413        | 8.33      |            |
| 327817 | E4315TRP  | 327893 | E4315TRPW  |           | 1500        | 5120        | 12.5      |            |
| 327824 | F4320TRP  | 327909 | F4320TRPW  | 208       | 2000        | 6826        | 9.6       |            |
| 327831 | HF4375TRP | 327916 | HF4375TRPW | 240 / 208 | 750 / 562   | 2560 / 1920 | 3.1 / 2.7 |            |
| 327848 | HF4310TRP | 327923 | HF4310TRPW |           | 1000 / 750  | 3413 / 2560 | 4.2 / 3.6 |            |
| 327855 | HF4315TRP | 327930 | HF4315TRPW |           | 1500 / 1125 | 5120 / 3840 | 6.3 / 5.4 |            |
| 327862 | HF4320TRP | 327947 | HF4320TRPW |           | 2000 / 1500 | 6826 / 5120 | 8.3 / 7.2 |            |

**NO IN-BUILT**  
**THERMOSTAT**  
Use with line voltage  
wall thermostat-page 69  
or field installed  
thermostats shown below

|        |          |        |           |           |             |             |           |            |
|--------|----------|--------|-----------|-----------|-------------|-------------|-----------|------------|
| 327954 | E4375RP  | 328036 | E4375RPW  | 120       | 750         | 2560        | 6.25      | <b>188</b> |
| 327961 | E4310RP  | 328043 | E4310RPW  |           | 1000        | 3413        | 8.33      |            |
| 327978 | E4315RP  | 328050 | E4315RPW  |           | 1500        | 5120        | 12.5      |            |
| 327985 | F4320RP  | 328067 | F4320RPW  | 208       | 2000        | 6826        | 9.6       |            |
| 327992 | HF4375RP | 328074 | HF4375RPW | 240 / 208 | 750 / 562   | 2560 / 1920 | 3.1 / 2.7 |            |
| 328005 | HF4310RP | 328081 | HF4310RPW |           | 1000 / 750  | 3413 / 2560 | 4.2 / 3.6 |            |
| 328012 | HF4315RP | 328098 | HF4315RPW |           | 1500 / 1125 | 5120 / 3840 | 6.3 / 5.4 |            |
| 328029 | HF4320RP | 328104 | HF4320RPW |           | 2000 / 1500 | 6826 / 5120 | 8.3 / 7.2 |            |

### ACCESSORIES

| UPC<br>686334                  | IVORY<br>MODEL | UPC<br>686334 | WHITE<br>MODEL | ACCESSORY OPTIONS                      | WT.<br>LBS. | LIST      |
|--------------------------------|----------------|---------------|----------------|----------------------------------------|-------------|-----------|
| 327657                         | 4300EX8        | 328456        | 4300EX8W       | 1" SEMI RECESSING EXTENDER             | 2           | <b>39</b> |
| 327664                         | 4300EX16       | 328463        | 4300EX16W      | 2" SEMI RECESSING EXTENDER             | 3           | <b>42</b> |
| 327671                         | 4300EX32       | 328470        | 4300EX32W      | 4" SURFACE MOUNTING FRAME              | 4           | <b>45</b> |
| 327688                         | 4300P          | 328487        | 4300PW         | WALL PLATE ADAPTOR (OD 21.5" x 12.25") | 1           | <b>28</b> |
| FIELD INSTALLED<br>THERMOSTATS |                | 329774        | 43T            | SINGLE POLE THERMOSTAT 50° - 90° F     | 1           | <b>42</b> |
|                                |                | 329781        | 43T2           | DOUBLE POLE THERMOSTAT 50° - 90° F     | 1           | <b>48</b> |